

HAND PUMP EASY-PUMP

Patented hand pump for glues, lacquers, paints and other viscous fluids. For containers with a height of 35 to 46 cm.

Advantages

- Can be mounted within seconds
- Always ready for use
- Clean: No adhesion
- No drying out, even when seldomly used
- Exact and economical dispense
- For a variety of purposes and independent of electricity, air, and the like



Use the included metal adaptor and a standard cordless drill with fixed rotating insert and standard bit holder (6 mm internal hexagon). If necessary, saw off the crank handle in order to avoid injuries that may be caused by the rotating handle. When using the cordless drill, the rotational speed must not exceed 200 rpm. Otherwise, there is no guarantee.


Ostermann Tip: When using it for new containers, the conveyor system can be quickly and easily filled with the cordless drill.





Assembly and operating manual

The simple plug-in design facilitates a quick mounting as well as an easy disassembly for the purpose of

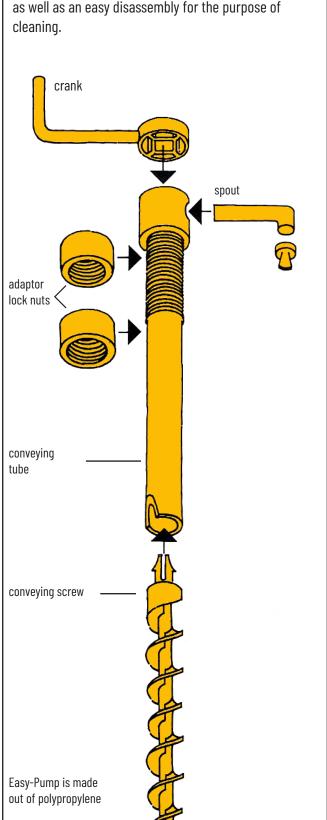

- Drill or cut a 35 mm hole into the lid or screw cap of the container. Next to this hole, drill another hole with a diameter of 1 mm. Prospectively, you can reuse the lid you prepared.
- Secure the prepared lid between the two nuts, depending on the height of the container. Please use the chamfered nut on top. For 45 cm containers, the upper nut is not necessary. Important: The conveying tube must always reach the bottom of the container.
- Put the Easy-Pump and the lid on the container. The conveying system will be filled by repeated, clock-wise turning. Attention: Close the spout after every use to keep the liquid contents from drying out.
- After having emptied the container completely, simply put Easy-Pump on a new, full container.

